


Owl 640 S

High Speed, low noise, digital SWIR camera

640 x 512 • 15 μ m x 15 μ m Pixel Pitch • Frame rate up to 300Hz •

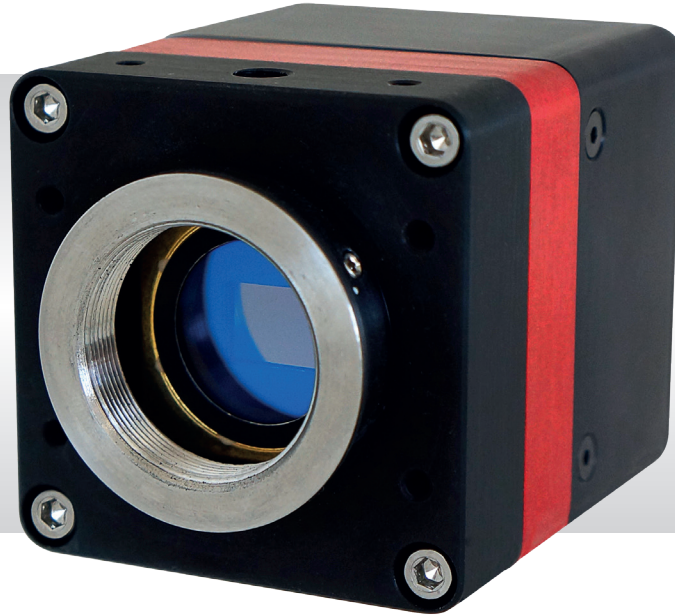

Key Features and Benefits

The best performing SWIR camera in the World!

- **High Speed - up to 300Hz**
Perfect for high speed imaging applications
- **SWIR technology**
Enables imaging from 0.9 μ m to 1.7 μ m
- **15 μ m x 15 μ m pixel pitch**
Enables highest resolution SWIR image
- **Ultra high intrascene dynamic range**
Enables simultaneous capture of bright & dark portions of a scene
- **On-board Automated Gain Control (AGC)**
Enables clear video in all light conditions
- **Ultra compact, Low power**
Ideal for hand-held, mobile or airborne systems

Resolution	640 x 512
Frame rate	Up to 300Hz
Readout noise	<30e-
Wavelength Range	SWIR

PRELIMINARY

Specification for Owl 640 S

Sensor Type	InGaAs PIN-Photodiode
Active Pixel	640 x 512
Pixel Pitch	15µm x 15µm
Active Area	9.6mm x 7.68mm
Spectral response ¹	0.9µm to 1.7µm
Readout Noise (RMS) LG = Low Gain HG = High Gain	HG: <30e-
Peak Quantum Efficiency	80% @ 1.5µm
Full Well Capacity	Low Gain: 120ke-, High Gain: 43ke-
Pixel Operability	>99.5%
Digital Output Format	12 bit Camera Link (Medium Configuration)
Exposure time ²	10µs to (frame period - readout time)
Shutter mode	Global shutter
Frame Rate	Up to 300Hz
Optical Interface	C mount
Trigger interface	Trigger IN and OUT - TTL compatible
Power supply	12V DC ±0.5V
TE Cooling	Active
Image Correction	3 point NUC (offset, Gain & Dark Current) + pixel correction
Functions controlled by serial communication	Exposure, intelligent AGC, Non Uniformity Correction, Gamma, Pk/Av, TEC, ALC ROI
Camera Power Consumption ³	<4W (TEC ON, NUC ON)
Operating Case Temperature ⁴	-20°C to +55°C
Storage Temperature	-30°C to +60°C
Dimensions (L*W*H) ⁵	74.2mm x 50.00mm x 50.00mm
Weight	250g

Raptor Photonics Limited reserves the right to change this document at any time without notice and disclaims liability for editorial, pictorial or typographical errors.

Ordering Information

Camera

Owl 640 S Digital Camera	OW17-CL-640
Owl Power Supply Cable	RPL-HR4-K

Optional Accessories

Mini PC with XCAP Std and frame grabber	RPL-PC-E1
EPIX® E8 Frame Grabber	RPL-EPIX-E8
EPIX® XCAP Std software	RPL-XCAP-STD
Camera Link Cable (2m) ⁶	RPL-MCL-CBL-2M
Optical SWIR lenses ⁷	RPL-xx-xxxx

Note 1: Optional filters available.

Note 2: Maximum exposure time will be dark current limited.

Note 3: Measured in an ambient of 25°C with adequate heat sinking.

Note 4: Extended operating temperature range on request.

Note 5: Dimensions include all connector parts on the camera interface.


Note 6: Two cables required.

Note 7: Please consult us to check our range of lenses.

Demo is available on request.
Pricing AOR subject to volumes.

Detailed technical drawings
can be downloaded at
www.raptorphotonics.com

Quantum Efficiency

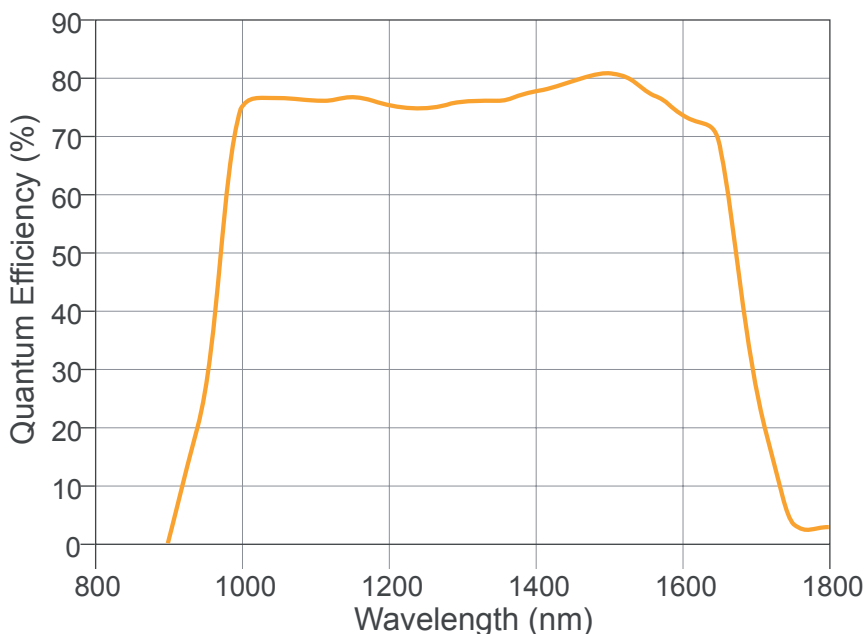

Applications

Surveillance

- Active Imaging
- Airborne Payload
- Hand Held Systems
- Imaging through Fog
- Range Finding
- Vision enhancement

Scientific

- Astronomy
- Beam Profiling
- Hyperspectral Imaging
- Semiconductor Inspection
- Solar Cell Inspection
- Thermography

Document #: INOW17-CL-640 0120



Willowbank Business Park
Larne, Co Antrim
BT40 2SF,
Northern Ireland

Raptor Photonics Ltd. (UK)
T: +44(0)2828 270 141
E: sales@raptorphotonics.com
www.raptorphotonics.com

Raptor Photonics Inc. (USA)
T: +1 (877) 230-4836
E: sales@raptorphotonics.com
www.raptorphotonics.com

